


Peso del lastre / Weight ballast

17 x 1250 Kg	
+	
2 x 1800 Kg	26850 Kg
2 x 1000 Kg	

 Peso de la grúa sin lastre / Dead weight without ballast / Konstruktionsgewicht ohne ballast / Poids de construction sans lest / Peso della gru senza zavorra


 Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - советоватьсья

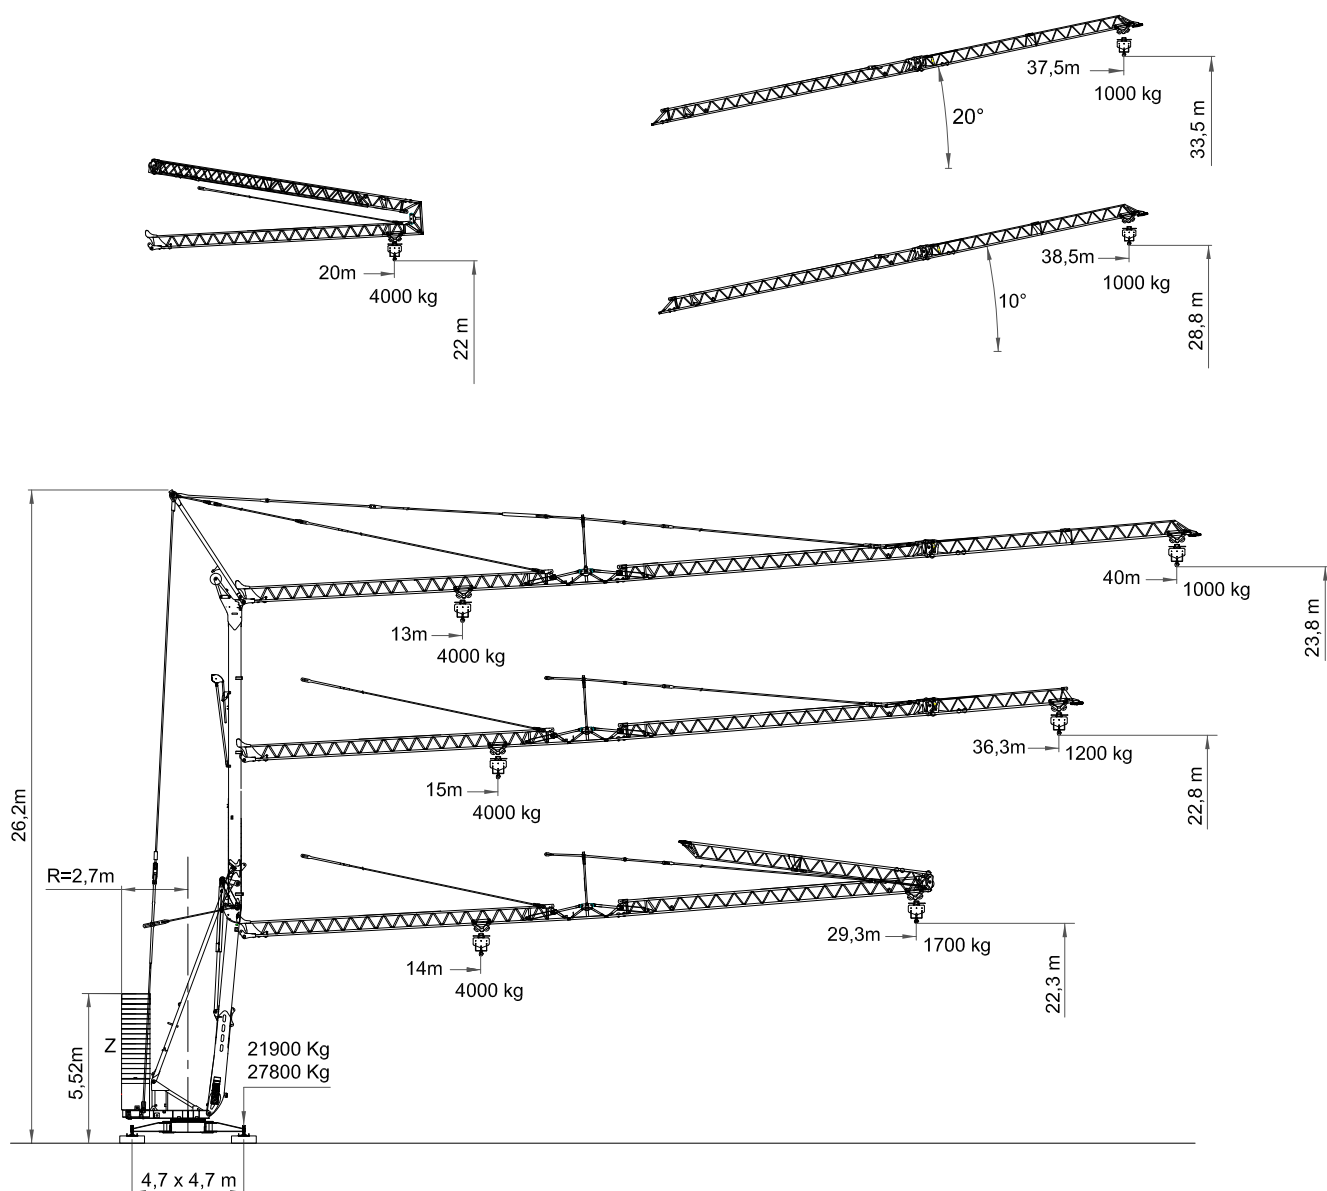

DIN/FEM 
EN 14439-FEM 1005
C25 D25 C50 D50



Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - График грузоподъёмности

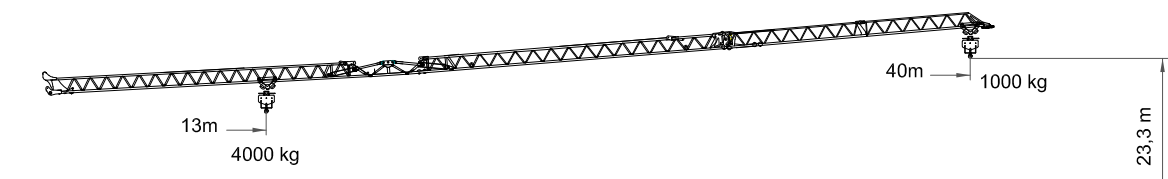


40 m

13	16,6	19,3	23,6	24,6	26,5	29,4	33,1	37,8	40	m
4000	3000	2500	2000	1900	1700	1500	1300	1100	1000	Kg




36,3 m

15	16,6	19,3	23,6	24,6	26,5	29,4	33,1	36,3	m
4000	3100	2500	2050	1950	1800	1600	1400	1200	Kg

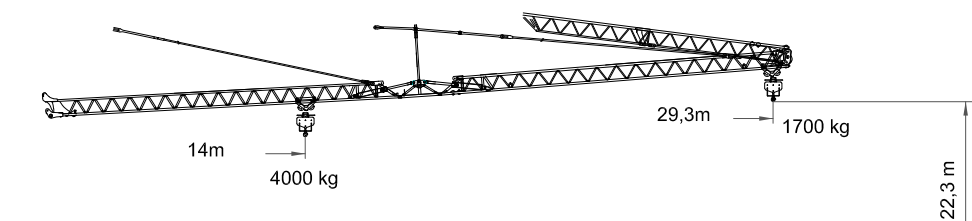


29,3 m

14	16	18	20	22	24	26	28	29,3	m
4000	3410	2950	2590	2300	2070	1880	1790	1700	Kg

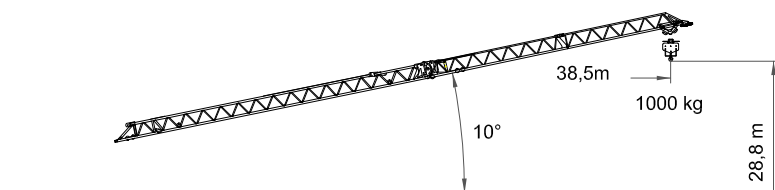

40 m

20	25	27	30	32	37	38,5	m
2000	1900	1700	1500	1400	1100	1000	Kg

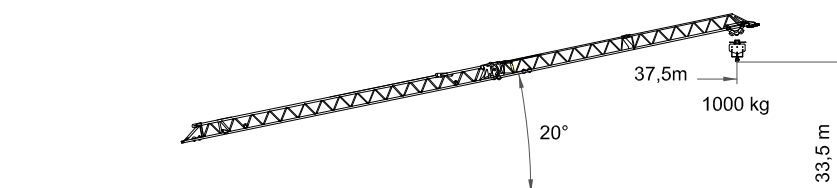

40 m

20	37,5	m
1000	1000	Kg

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

					
	m/min	4	25	40	55
	Kg	4000	4000	2000	1250
	Kw	15			
	ECO MODE				
	m/min	4	20	33	50
	Kg	4000	4000	2000	1000
	m/min	15		30	41
	Kg	1000—4000			
	Kw	3			
	r.p.m	0,25	0,5		0,8
	N.m.	30			
	Kw	4			


-  Elevación / Hoisting / Heben / Levage / Sollevamento
 Distribución / Trolleying / Katzfahren / Distribution / Diritubuzione
 Orientación / Slewing / Schwenken / Orientation / Rotazione
 Montaje / Erection / Montage / Montage / Montaggio

 2000/14/CEE 2005/88/CEE	 2006/95/CEE	400V 50Hz I _{max} = 35A Fuse= 40A	TOTAL POWER 21 KVA	GENERATOR 36 KVA	100m 4x10mm ²	150m 4x10mm ²	200m 4x10mm ²
---	--	--	-----------------------	---------------------	-----------------------------	-----------------------------	-----------------------------


ECO MODE

 2000/14/CEE 2005/88/CEE	 2006/95/CEE	400V 50Hz I _{max} = 30A Fuse= 35A	TOTAL POWER 16 KVA	GENERATOR 36 KVA	100m 4x10mm ²	150m 4x10mm ²	200m 4x10mm ²
---	--	--	-----------------------	---------------------	-----------------------------	-----------------------------	-----------------------------


Dimensiones y transporte- dimensions and transport - Abmessungen und Transport- dimensions et des transporte - dimensioni e trasporti - Размеры и транспорта

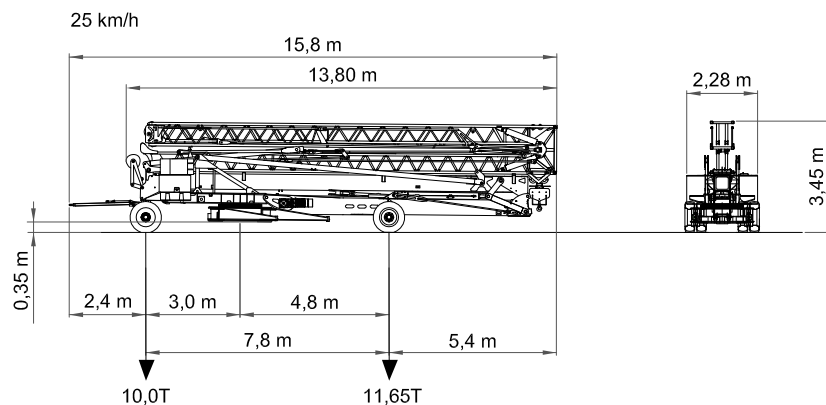

H-40	16500kg
Weight ballast	2x1800kg
Front axle	750kg
Rear axle	800kg
P	21650kg

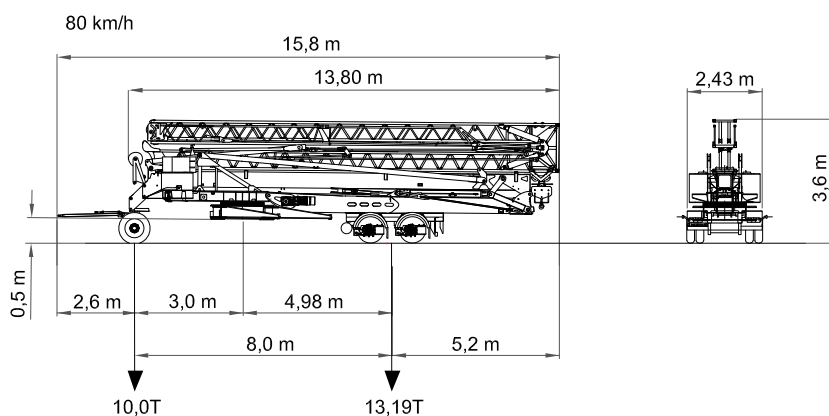



H-40	16500kg
Weight ballast	2x1800kg
Front axle	750kg
Rear axle	2340kg
P	23190kg

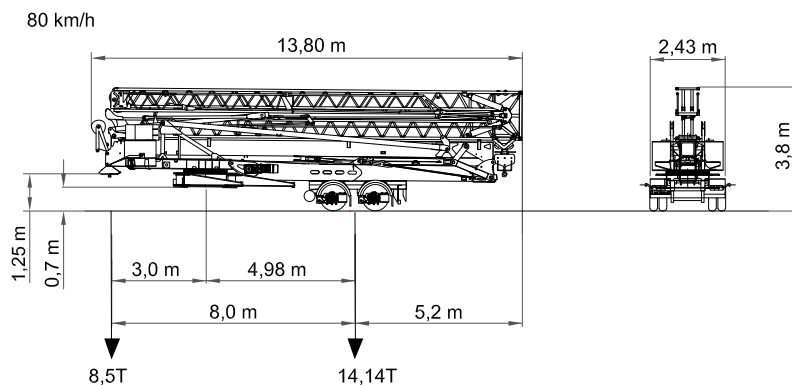

H-40	16500kg
Weight ballast	2x1800kg
5ª	200kg
Rear axle	2340kg
P	22640kg

Montaje - Erection - Montage - Montage - Montaggio

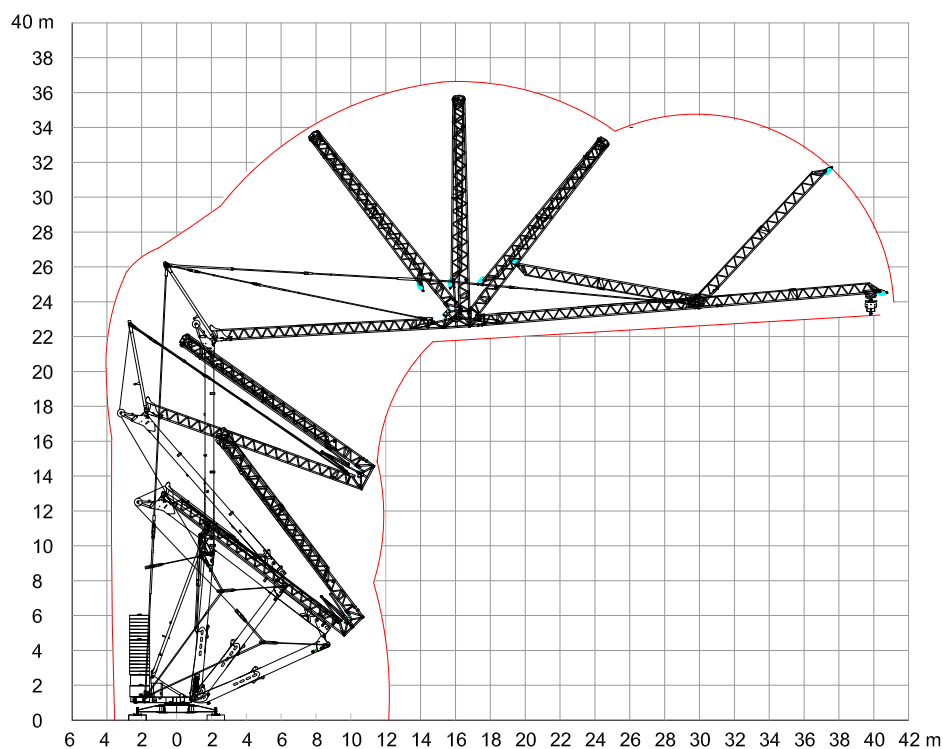

		L (m)	W (m)	H (m)	P (kg)
Eje de transporte delantero Road transport axle front / Transportachse vorne Essieux de transport avant / Asse di trasporto anteriore	25km/h  	2,05	1,24	1,07	750
Eje de transporte trasero / Road transport axle behind / Transportachse hinten / Essieux de transport arrière / Asse di trasporto posteriore	25km/h 	0,89	2,40	0,89	800
Eje de transporte delantero Road transport axle front / Transportachse vorne Essieux de transport avant / Asse di trasporto anteriore	80km/h  	2,05	1,24	1,07	750
Eje de transporte trasero con freno Transportachse hinten mit brense Essieux de transport arrière avec frein Asse di trasporto posteriore con freno	80km/h  	1,25	2,40	1,35	2340